


KIT IP HD PLUG & PLAY : HD CAMERA 720P GGM KITIPCAM

CAMERAS SPECIFICATIONS



GGM KITIPCAM

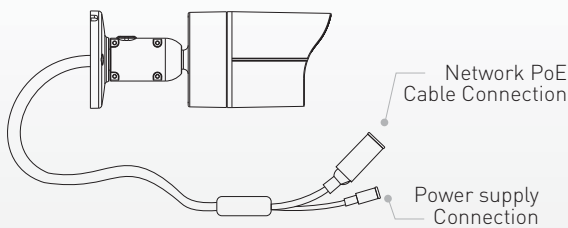

MODEL		NETWORK		ALARM	
	GGM KITIPCAM	Network interface	RJ45 10/100		NO
		Network Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, SNMP, QoS, UPnP, NTP, Supports		
PARAMETER		ONVIF	Supports	OTHERS	
Image Sensor	1/2.7" CMOS Digital Image Sensor(SONY IMX138)	Network Preview	Web server embedded, Support IE	Operation Temperature	-20°C - 55°C
Pixels	1280 (H) x 720 (V)			Operation Humidity	0% - 90%
minimum illumination	0.01 lx			Power supply	DC 12V / PON (power by NVR mainboard)
S/N	45db			Protection	IP66
IR	> 10 to 15m			Power	<5W
IR-Cut	Color to BW : 2Lux; BW to Color : 6Lux			Dimension	ø60 x 113.3mm
OPTICAL LENS		VIDEO		WARRANTY	
Interface	M12	Video encode	H.264 Baseline Profile/ H.264 Main Profile		2 years
Lens	Fixed Iris Lens	Resolution	Main stream:720p @25fps; Sub stream:VGA/QVGA@ 25fps/720P @8fps		
Focal length	3.6mm	Bitrate	Main stream:500Kbps ~ 600Kbps; Sub stream:159Kbps ~ 1600Kbps		
		CBR/VBR	Support		