



STANDARD DOME IP CAMERA

GGM IPSC6F2IR



Standard Range

This high-performance camera from the «Standard» series is ideal for site security projects, in the tertiary sector, retail, administrative buildings where discretion is sometimes necessary....

FEATURES

Software :	5.2.3
Model Type :	Dome
Chipset :	Novatek
Image sensor :	1/2.5" CMOS
Image size :	3200×1800
Electronic shutter :	1 / 4 s ~ 1 / 100000s
Iris Type :	Fixed Iris
Minimum illumination :	0.008 lux @F1.6, AGC ON; 0 lux with IR on
Lens :	2.8 mm@F1.6
Focus :	Fixed Iris
Lens Mount :	M12
Field of view H/V/D :	Horizontal FoV: 104°; Vertical FoV:55°; Diagonal FoV:128°
Day & Night :	Auto
WDR (wide dynamic range) :	120dB
BLC :	Yes
HLC :	Yes
Defog :	No
S/N ratio :	≥50dB
Digital NR :	3D DNR
EIS :	No
Angle adjustment :	Pan: 0°~360° ; Tilt:0°~70° ; Rotation: 0°~350°

PICTURE

Video compression :	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub /Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H265 Compression standard :	H.265 Compression Standard: Main Profile@Level4.1 High Tier
Privacy mask :	4 mask
Main stream :	60Hz: 6MP(1~20fps) /4MP/1080P (1~30fps) 50Hz: 6MP(1~20fps) /4MP/1080P (1~25fps)
Sub Stream :	720P/D1/VGA/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Third stream :	D1/480× 240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Bitrate :	64 Kbps ~8Mbps
Bit rate Type :	VBR / CBR
Audio Compression :	G711A/U
Image settings :	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
Corridor mode :	Yes
ROI :	Each ROI to be configured separately

INTERFACES

Network :	RJ 45
Surge Protection :	Differential Mode±2KV, Common Mode±4KV
Video Output :	No
Number of audio in :	1
Number of audio out :	0
Built-in speaker :	/
Built-in microphone :	1CH built-in MIC
Storage :	Network remote storage; micro SD card storage up to 256 Gb
Reset :	Yes
Alarm in :	/
Alarm out :	/

ANALYTICS

Smart Event :	Line crossing/region intrusion (human/vehicle classification), abandoned/missing object detection
Statistics :	/
Exception detection :	video exception
Face detection :	/
Video Metadata :	/

DORI (BASED ON 2.8mm/2.8-12mm)

Detect :	69m(226ft)
Observe :	28m(92ft)
Recognize :	14m(46ft)
Identify :	7m(23ft)

FUNCTIONS

Remote monitoring :	Web browser /TVT NVR/GGM CENTRAL/GGM WATCH
Web browser :	Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online connection :	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network protocol :	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTPS, HTTP POST, P2P, QoS
Onvif version/Profile :	ONVIF 24.06/M, T, S, G
Smart Alarm :	Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, video exception
General function :	Watermark, IP address filtering, video mask, heartbeat, ANR, cloud upgrade, corridor pattern
Security :	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP
POE :	Yes (IEEE802.3af)
IR distance :	10 ~ 20 m
Warm led distance :	/
IP protection rate :	IP67
IK protection rate :	IK10


OTHERS

Power supply :	DC12V/PoE
Power consumption :	< 5.5W
Storage conditions :	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating conditions :	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimension :	Ø 110.4 x 62
Weight :	Approx. 0.4KG
Installation :	Ceiling mounting; Wall mounting
Certificate :	CE, FCC
Environmental protection :	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

PART-NUMBER

PART-NUMBER	DESCRIPTION
GGM IPSC6F2IR	Standard Compact dome Res 6MP lens 2.8mm IR 20m AI Function IP67 IK10 ONVIF NDAA

DIMENSIONS FOR GGM IPSC6F2IR

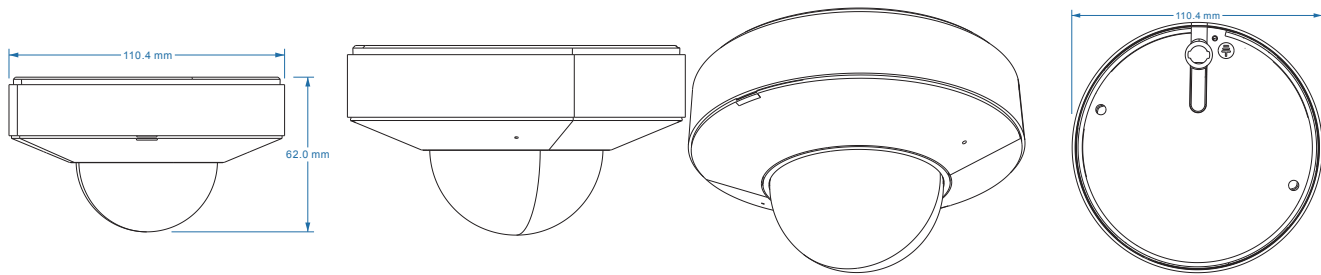

ACCESSORIES FOR GGM IPSC6F2IR



GGM AWMB005



GGM AWMB001